LUCI



REQUEST FOR PROPOSAL
JACKSON RANCHERIA CASINO RESORT

An A/V retrofit for Jackson Rancheria Casino Resort: audio, video, digital signage, and direct-view LED.

PREPARED FOR	Jackson Rancheria Casino Resort
PREPARED BY	LUCI Systems, LLC
BASIS	Jackson Rancheria Casino Resort A/V RFP
DATE	November 3, 2026

JACKSON RANCHERIA
CASINO RESORT
Family Owned & Operated SINCE 1985

LUCI Systems, LLC
6280 S. Valley View Blvd., Bldg. B / Ste. 208
Las Vegas, NV 89118

November 3, 2026

George F. Haldeman
Jackson Rancheria Casino Resort
12222 New York Ranch Rd
Jackson, CA 95642
ghaldeman@JacksonCasino.com

Subject: A/V retrofit — RFP

Hi George,

LUCI Systems and our established digital signage partner, TelemetryTV, are pleased to provide this proposal for Jackson Rancheria Casino Resort. Together, we bring two complementary approaches:

- **LUCI** — installed on-premises at your property for day-to-day A/V control
- **TelemetryTV** — a cloud-based platform for managing digital signage content

Our goal is to bring audio, video, digital signage, and LED together in a way that feels simple for your team. We appreciate the opportunity to learn more about your goals and explore how we can support your property for years to come. Our teams have already deployed thousands of TelemetryTV players across LUCI client locations nationwide, and we see a real opportunity to pair that experience with LUCI automation for engaging, event-driven signage throughout Jackson Rancheria.

We put our best effort into building this initial scope and budget using what we know about casinos of your size and day-to-day operations, along with our experience supporting LUCI in more than 100 casinos across the country. We made some working assumptions along the way, and we look forward to reviewing those together to see whether the scope, approach, and pricing align with what you have in mind.

The equipment list is a starting point, not a fixed design. Every item—including manufacturer selections, models, and quantities—can be reviewed and adjusted as we learn more about your property and priorities. Our experience across the casino industry gives us a strong understanding of what works reliably and what is easiest to support, but LUCI is intentionally flexible in the systems we integrate. We look for partners who share our approach:

- Lead with software rather than unnecessary hardware
- Keep the experience simple for your staff
- Place just as much importance on Day 2 support as the initial installation

Together, we can refine the right combination of technology, cost, and long-term service for Jackson Rancheria.

One area we are especially excited to explore together is the LED experience. The current proposal treats each LED feature as a standalone display, with its own processing, freight, and installation allowance. During our site visit, we would like to look at these features as a whole and see where a more connected design could create a memorable guest experience while potentially reducing equipment and project costs.

If the direction feels right, our next step would be a detailed visit to the property with your team. That gives us a chance to walk the spaces, confirm requirements, and talk through how to phase the installation around your operations. We would also be happy to arrange a visit to a nearby LUCI property so your team can see the platform in action.

At LUCI, our goal is more than installing equipment. We want to become part of your team, make the technology easier for your staff to use, and create a platform that can grow with the property. Centralized control, meaningful automation, and responsive long-term support are at the heart of what we do. We see this proposal as the start of a conversation and, hopefully, a lasting partnership. The pages that follow outline our proposed equipment, services, and project responsibilities. We look forward to talking through it with you.

Thank you,
LUCI Systems

LUCI

THE ORCHESTRATION ENGINE FOR ENTERPRISE MULTIMEDIA.

One interface to control, automate, and execute the entire guest experience.

01 Control

Adjust lights, sound, screens, and signage — any zone, by hand or automatically.

02 Automate

Build scenes once — game time, happy hour, morning reset — and fire them on schedule or trigger.

03 Execute

The whole room delivers the moment, in sync — no staff scrambling.



Complete visibility across your property
Access to every endpoint from a map-based interface.

Align your teams by default
Every team strategizes from the same launch pad.


Fully activate the guest experience
Passive screens become purposeful, real-time guest moments.

Invest in the only A/V that scales and improves
Refined continuously — and built to extend when you expand into sister properties.

WHAT LUCI IS

Two forces working as one.

The orchestration platform plus the embedded operation that runs it — one interface, one accountable team.

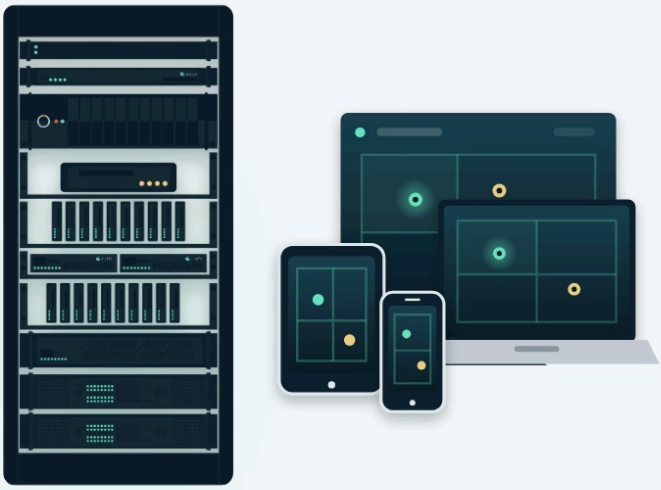

LUCI

THE ORCHESTRATION PLATFORM

Software & minimal hardware



Systems

THE EMBEDDED OPERATION

Our team, processes, and standards

KEY FEATURES

Map-based dashboard

Every display, audio zone, and endpoint on one live floor plan.

Open integration

Connects any A/V, signage, or building system via open APIs.

PIN-delegated control

Each user controls only their zones — permissions follow roles.

Predictive monitoring & alerts

Surfaces and resolves common issues before the guest notices.

Presets & scheduling

Save and schedule scenes so daily transitions run themselves.

Automation & triggers

Fire coordinated responses to jackpots, weather, and emergencies.

01

Basis of the scope

This scope outlines the equipment and services included in the current bill of materials. Where the RFP did not specify a quantity, we used a practical working estimate based on our experience. We can review and refine those counts together as the design develops. Speaker locations, control-tablet locations, and final LED dimensions will be confirmed during design.

LUCI furnishes and installs

LUCI will furnish the equipment listed in the bill of materials and install, program, and commission the head-end equipment, TV set-top boxes, signage players, control tablets, and Q-SYS audio system. The direct-view LED pricing also includes LED design, ocean freight, installation, programming, commissioning, testing, and workflow training.

The property's installation trades

The property's installation trades will handle loudspeaker installation, racks, backing, and power, data, and speaker cabling. LUCI will provide the drawings needed to coordinate that work and help keep everyone aligned.

02

Professional services

Our integration design services bring the project together, from onboarding and design drawings to project management, system integration, and audio/video programming.

Drawings and coordination

We will prepare drawings showing head-end and device locations, rack elevations, speaker layouts, and system power and data requirements. We will stay connected through remote and on-site coordination meetings, and we will track procurement in shared software so your team can easily follow orders, deliveries, and progress.

Audio and video programming

Audio and video programming are included. We will configure Q-SYS signal flow and zones, DirecTV and IPTV channel layouts, presets, emergency override, and display power schedules from the control tablets. We will also configure the signage players and bring them into LUCI under the included endpoint licenses.

Commissioning and onboarding

We will commission the systems LUCI installs once the related cabling and field work by others are ready. During onboarding, we will work with your Marketing, IT, Facilities, Security, and A/V Operations teams to make sure the final workflows fit the people using the system every day.

> LED design, ocean freight, installation, programming, commissioning, testing, and workflow training are already included in the LED pricing in Section 7 and are not charged again under professional services.

03 LUCI software and endpoints

Jackson Rancheria will join LUCI through our annual operating-system partnership, which includes consulting services and the subscription SLA. The proposed scope includes 190 endpoint licenses:

- 100 video endpoints, for IPTV distribution and control.
- 40 audio endpoints, for audio zone control.
- 50 digital signage endpoints, for the media players.

> Lighting endpoint licenses are not included. The lighting count on the equipment list is zero.

Two LUCI Core computers are furnished and installed at the property's head-end. LUCI operates on-premises, keeping the core A/V control platform local to your property. A secure VPN connection is required so LUCI can access the system remotely for diagnostics, updates, and support. TelemetryTV digital signage management is cloud-based, with content delivered through the signage players; no separate on-site signage content-management server is included.

Ten 11-inch tablets, tabletop cases, PoE-to-USB-C adaptors, and PoE injectors are furnished. LUCI installs the tablets. They are the user-control stations for source selection, channel selection, presets, emergency override, and display power scheduling. The RFP described four control locations. This scope includes ten tablets so the property can place control where the operation needs it. The count can be changed on request. Network drops to the tablet locations are by others.

04 Professional audio

The audio system is Q-SYS. Two Redundant Q-SYS Core X10 processors are furnished, each with a 64-channel Dante license. One QIO-24f and four QIO-ML4i expanders, ten eight-channel CX-Q 8K8 amplifiers, ten stereo input adaptors, and eight Dante analog adaptors complete the head-end. LUCI installs this equipment in existing racks provided by owner, programs the DSP, and tunes / zones the system after the loudspeakers and speaker cabling are complete.

Two hundred JBL Control 447C/T 6.5-inch ceiling loudspeakers are furnished for the public areas named in the RFP: the main gaming floor, porte cochere, main entry lobby, promotional areas, and public gathering spaces. Color, black or white, is confirmed with the property. We have included 200 loudspeakers as a starting point and can fine-tune that count once we confirm locations together on the drawings. Others install the loudspeakers, speaker cable, and backing.

The wireless system is furnished for promotions, events, and announcements. It includes one Shure SLX-D+ four-channel Dante receiver, four Beta 58 handheld transmitters, rechargeable batteries and charging as listed, one Professional Wireless Omega-8 antenna distribution system, and eight Shure UA864 wall-mount antennas. LUCI installs the receiver and the antenna distribution at the head-end, sets up the charging stations, programs the wireless system into Q-SYS, and commissions it. Others mount the antennas and install the antenna cable. Bodypack transmitters are not on this equipment list and can be added on request.

> Dedicated ambient-sense microphones are not on this equipment list. Zone levels and presets are part of the Q-SYS programming. Sense microphones can be added on request.

05

Video distribution

For Phase One, we have used a working display count based on the property's anticipated needs, including the new display identified at Margaret's. This scope includes 100 IPTV set-top boxes as the working Phase One quantity. If the intent is to replace the TVs throughout the property purchasing the compatible Pro:Idiom models would eliminate the need for set top boxes. The TVs would connect directly to the network. In either instance the count can be adjusted to the property's confirmed number.

The head-end is a Technicolor COM3000 package providing 138 individual satellite receiver/tuner resources for encrypted DIRECTV programming, along with IPTV distribution throughout the property. Rather than managing each receiver separately, LUCI brings these resources together in one easy-to-use interface. Property administrators can oversee the full channel lineup and receiver assignments, while control can also be delegated by department, venue, or individual user. This allows authorized teams to manage the television content relevant to their areas without giving them access to the entire property. User permissions, channel access, and operational presets will be refined with the property during programming to match how each venue prefers to operate. The system also includes four LUCI NX5 five-channel HDMI encoders, each providing five H.265 channels with web preview. LUCI will install and configure the head-end and encoders. One hundred LG STB-6500 set-top boxes, each with an HDMI cable, are furnished and installed by LUCI at the designated displays, with 100 corresponding LUCI video endpoint licenses.

Display panels, mounts, power, and data to the set-top boxes are by others. The ongoing DirecTV programming subscription remains with the property. Channel lineup, presets, emergency override, and display power scheduling are programmed as part of the video programming, and are operated from the tablets in Section 3.

Commissioning of the head-end and the set-top boxes is included after power and data are available at the displays.

06

Digital signage

TelemetryTV is an established cloud-based digital signage and application platform designed to make content management easy across one venue or an entire enterprise. LUCI has deployed thousands of TelemetryTV endpoint players at client properties throughout the country, giving our teams firsthand experience supporting the platform in busy casino environments. Like LUCI, TelemetryTV takes an API-first approach, allowing authorized teams to connect existing systems, automate workflows, and build new experiences without being limited to a traditional playlist. TelemetryTV manages content, schedules, and device groups through its cloud service; LUCI remains installed on-premises for local A/V control. No separate signage content-management server is added at the property. Fifty MeLe Quieter3 players with TelemetryTV OS are furnished, each supporting dual 4K outputs, along with 50 corresponding digital signage endpoint licenses. This is a working quantity to refine during the property walk; suitable existing Intel-based players may reduce the number of new devices required.

LUCI will install and configure the players, establish device groups, and work with the property to organize content and schedules by venue or department. Five marketing channels are planned as playlists rather than separate systems. TelemetryTV also offers a broad library of ready-to-use applications for everyday needs, including menu boards, event information, wayfinding, calendars, live feeds, and promotional messaging. Custom WebApps can bring in information from other business systems and present it in a way that fits the property's brand. Players can also provide content sources for the LED features described in Section 7, with shared playlists where appropriate and independent sources where desired.

A particularly exciting opportunity is connecting casino events with the guest experience. Using the LUCI scripting engine together with TelemetryTV APIs, webhooks, and content overrides, we can explore workflows where a qualifying jackpot or other approved event triggers a targeted celebration across designated displays. The same approach can support scheduled promotions, event announcements, temporary takeovers, and other coordinated messaging without requiring staff to update each screen individually. These are potential integration workflows to be refined with the property; live jackpot triggering depends on the data and interfaces made available by Aristocrat Oasis or other approved gaming systems, along with the final programming scope.

Display panels, menu-board panels, mounts, power, and data are by others. Menu-board application capabilities are available through the platform, but the RFP did not specify a menu-board count and no additional menu-board displays are included in this equipment list. Interactive wayfinding kiosks, the guest directory, and the 240-point database are also not included at this stage; they can be considered as future applications. Our goal is to build a flexible signage foundation that serves the property's day-to-day needs today and can grow into more personalized guest experiences over time.

LUCI will commission the signage players once power, network connectivity, and displays are ready, and coordinate onboarding, initial content workflows, and operational training with the property. Cloud service availability, platform updates, and device health capabilities follow the applicable TelemetryTV service and LUCI support arrangements.

07 Direct-view LED

The LED packages are currently budgeted as individual, standalone features. Each includes its own allocated processing, ocean freight, and installation costs. This gives us a clear starting point, but it is not necessarily the most efficient or engaging final design. Working with your team, we would like to refine how these displays relate to one another—whether through coordinated content, shared visual moments, or combining nearby features into a more unified experience for guests.

As the layout and operating goals become clearer, we will review opportunities to consolidate LED processing where technically practical, coordinate manufacturing and bulk freight, and streamline installation mobilization and labor. These efficiencies could reduce the overall cost while giving the property a stronger, more cohesive LED presentation. Any savings will depend on the final design, display locations, signal distances, processing capacity, shipping logistics, and installation schedule; we will review options and update the budget together before final approval and equipment release.

LED pricing for each location below includes design, ocean freight, installation, programming, commissioning, testing, and workflow training. Power, data, backing, and racks at the displays are by others. LUCI installs the Novastar processors at the head-end. Signal cable from each processor to its display is by others. LUCI provides weight, power, data, and mounting requirements on the drawings.

We have included a starting allowance for the staggered pit pillars and overhead directional signs. This scope includes one pit-pillar wrap and one overhead directional sign, separate from the front overhead sign. Additional pillars or signs can be added in the same form.

Displays included:

- Front overhead sign: one display, 1.56 mm, 8 ft wide by 3 ft high, ceiling-hung. The architectural enclosure is by others.
- Promotional wall: one display, 1.56 mm, up to 10 ft 5 in wide by 7 ft 4 in high. Field measurement confirms the final size before release.

- Center pillar wrap: one pillar, 1.56 mm, 10 ft 9 in high by 4 ft wide per side, full wrap with 45-degree corners.
- Staggered pit pillars: one wrap, 1.56 mm, 5 ft 10 in high by 4 ft wide per side, full wrap with 45-degree corners.
- Medium pillar wraps near Margaret's: three pillars, 1.56 mm, 7 ft 4 in high by 4 ft wide per side, full wrap with 45-degree corners.
- High-ceiling soffit near Margaret's: one display, 1.87 mm, 8 ft high by 18 ft wide. The RFP allowed 2.9 mm at this location because of viewing distance. This display is furnished at 1.87 mm.
- Overhead directional signage: one display, 1.56 mm, 8 ft wide by 3 ft high.

Processing is nine Novastar H2 chassis, each with a 16-port output card and a 4K HDMI input card, one processor set for each display package above. Workflow training for the LED system is included in the LED pricing. Wrap side counts are confirmed in the field before fabrication. A full wrap is planned as four sides until that check says otherwise.

08 Line items

Quantities below match the equipment list. Section labels follow that list.

LUCI software

QTY	MFG	MODEL	DESCRIPTION	COST EA	SUBTOTAL
Annual	LUCI	LUCI OS	LUCI Operating System Software, Consulting Services & SLA Warranty Annual Partnership Subscription	—	$69,350.00
190	LUCI	LUCI ENDPOINT	Endpoint Licenses Total Count	$365.00	$69,350.00

LUCI Multimedia Management System

QTY	MFG	MODEL	DESCRIPTION	COST EA	SUBTOTAL
2	NUC	NUC	LUCI Core Beelink Server PC 32gig Ram, 500gig SSD HD, i5	$838.80	$1,677.60
10	Apple	iPad	11th Generation 11" Touch Tablet	$471.45	$4,714.50
10	Bouncepad	Link	Tabletop iPad Case	$157.50	$1,575.00
10	Texas POE	GAT-USBC-PD-R2V3	POE to USB-C Charging and Ethernet Adaptor	$157.50	$1,575.00
10	TRENDnet	TPE-119GI	Gigabit PoE++ Injector	$51.45	$514.50

Audio System

QTY	MFG	MODEL	DESCRIPTION	COST EA	SUBTOTAL
2	QSC	SERVER CORE X10	Q-SYS X-Class Server Core for A/V&C processing built on enterprise-grade IT server hardware	$6,560.40	$13,120.80
2	QSC	SL-DAN-64-P	QSYS 64×64 Dante Software License	$1,310.10	$2,620.20
1	QSC	QIO-24f	Q-SYS peripheral providing 8 mic/line inputs, 8 line outputs, and 8 FLEX I/O; with 8×8 GPIO.	$2,389.20	$2,389.20
10	QSC	CX-Q 8K8	QSYS Amplifier - 8 CH. - 1000 WATT w/8 Routable inputs	$5,223.90	$52,239.00
4	QSC	QIO-ML4i	QSYS I/O - 4 CH. Mic/Line Analog Input	$535.70	$2,142.80
10	RDL	TX-J3	Stereo RCA & 3.5 to Mono Balanced Adaptor	$79.20	$792.00
4	Audinate	AVIO-A-2IN-EB	2 Channel Dante AVIO Install Analog Input Adapter for Pro A/V Setups - 6-pin Euroblock Terminals	$262.27	$1,049.09
4	Audinate	AVIO-A-2OUT-EB	2-Channel Dante AVIO Install Analog Output Adapter for Pro A/V Setups - 6-pin	$262.27	$1,049.09
200	JBL	Control 447C/T	6.5" Two-Way Coaxial Ceiling Loudspeaker avail. Black or White	$290.62	$58,124.00

Wireless Microphone System

QTY	MFG	MODEL	DESCRIPTION	COST EA	SUBTOTAL
1	Shure	SLXD4QDAN+=-G57	SLXD+ Quad Channel Receiver with Dante Audio	$3,263.38	$3,263.38
4	Shure	SLXD2+/B58=-G57	Single Wireless System with B58A Handheld Microphone	$352.88	$1,411.52
4	Shure	SBC203	Rechargeable Battery for SLX-D+ Wireless Transmitters	$255.85	$1,023.40
2	Shure	SBC203-US	Dual Docking Recharging Station for SB903	$147.10	$294.21
1	Professional Wireless	Omega-8 Multizone	4 Diversity antenna input (8 total) 8 diversity antenna outputs (16 total) distribution system	$4,288.90	$4,288.90

8	Shure	UA864US	Wall mount wideband antenna	$468.45	$3,747.57

Video System

QTY	MFG	MODEL	DESCRIPTION	COST EA	SUBTOTAL
1	Technicolor	COM3000	COM3000 PKG - 138 Channel Encrypted DirecTV System - Includes RF Signal Distribution	$12,320.00	$12,320.00
4	LUCI	NX5	5 CH IPTV H.265/5 HDCP Compliant Encoder with Web Preview	$3,600.00	$14,400.00
100	LG	STB-6500	LG STB-6500 IPTV Set Top Box Receiver with HDMI Cable	$174.90	$17,490.00

Digital Signage System

QTY	MFG	MODEL	DESCRIPTION	COST EA	SUBTOTAL
50	MeLe	Quieter3	TelemetryTV OS Dual 4K Digital Signage Player	$508.98	$25,449.00

LED System

QTY	MFG	MODEL	DESCRIPTION	COST EA	SUBTOTAL
1	DesignLED	DesignLED	1.56mm COB Rigid - Front Overhead Sign, 8 ft wide by 3 ft high, 1.5 mm, ceiling-hung inside an architectural enclosure	$19,630.00	$19,630.00
1	DesignLED	DesignLED	1.56mm COB Rigid - Promotional Wall, up to 10 ft 5 in wide by 7 ft 4 in high, 1.5 mm	$48,760.00	$48,760.00
1	DesignLED	DesignLED	1.56mm COB Rigid - Center Pillar Wrap, 10 ft 9 in high by 4 ft wide per side, 1.5 mm, full wrap, 45-degree corners	$86,540.00	$86,540.00
1	DesignLED	DesignLED	1.56mm COB Rigid - Staggered Pit Pillars, 5 ft 10 in high by 4 ft wide per side, 1.5 mm, full wrap, 45-degree corners	$51,630.00	$51,630.00
3	DesignLED	DesignLED	1.56mm COB Rigid - Three medium pillar wraps near Margaret's, 7 ft 4 in high by 4 ft wide per side, 1.5 mm, full wrap, 45-degree corners	$69,100.00	$207,300.00

1	**DesignLED**	**DesignLED**	1.87mm COB Rigid - High-ceiling soffit display near Margaret's, 8 ft high by 18 ft wide, 2.9 mm acceptable	**$78,650.00**	**$78,650.00**
1	**DesignLED**	**DesignLED**	1.56mm COB Rigid - Overhead directional signage, 8 ft wide by 3 ft high, 1.5 mm	**$19,630.00**	**$19,630.00**
9	**Novastar**	**H2**	2 RU Video Processor Chassis and Power Supply	**$535.20**	**$4,816.80**
9	**Novastar**	**H_16xRJ45 Sending Card**	16 Port Output Card for H Series Chassis	**$1,344.00**	**$12,096.00**
9	**Novastar**	**H_1xHDMI2.0 Input Card**	1 - 4K Input Card for H-Series Video Processor Chassis	**$891.60**	**$8,024.40**

Professional services

QTY	MFG	MODEL	DESCRIPTION	COST EA	SUBTOTAL
1	**LUCI**	**LUCI IDS**	LUCI - Integration Design Services - Onboarding, Systems and Design Drawings, Project Management, Systems Integration & LUCI, Video and Audio Programming	**$87,500.00**	**$87,500.00**

Investment summary

Budgetary pricing for the Jackson Rancheria A/V retrofit. Figures are confirmed on site before a final quote.

Software (Annual Partnership)	**$69,350.00**
Hardware	**$754,291.35**
Professional Services	**$87,500.00**
Estimated Shipping	**$1,875.00**
Estimated Travel	**$4,410.00**
Tax	**$0.00**
Total	**$917,426.35**

Payment terms

Milestone-based payment schedule. All amounts in USD.

$420,895.68

Milestone 1

Deposit upon award — 50% equipment + 50% professional services

$377,145.68

Milestone 1-2

Pre-shipment — remaining 50% equipment, due on final piece shipping date

$119,385.00

Milestone 2

Final acceptance — remaining 50% professional services + software + shipping + travel

---

Sales tax is not applicable — tribal entity. Quote valid for 30 days from the date of this proposal.

09

Warranty, service and ongoing support

LUCI CARE and platform support

Our relationship does not end when the system goes live. LUCI runs locally on the property's own servers, while our annual partnership provides remote support, system monitoring and diagnostics, software maintenance and updates, ongoing training, and technology planning. With a secure VPN connection available for LUCI support, our team can assist remotely without needing to be on-site for every question. Our goal is to become an extension of your staff and help your team confidently manage the system day to day.

We believe your team should be the first line of control, not dependent on a third-party specialist for every adjustment. LUCI keeps dedicated hardware to a minimum and brings audio, video, signage, and LED control into one intuitive interface. Device feedback, proactive notifications, onboard help resources, and the experience shared across the LUCI community make it easier for your staff to identify and address common issues. When additional help is needed, LUCI can remotely diagnose the system and work alongside your team or the appropriate manufacturer.

LUCI technical support can be contacted 24/7 at 833-333-5868, option 1, or through www.lucisystems.com/support. LUCI requires a secure, continuously available VPN connection, coordinated with property IT, to perform remote diagnostics, maintenance, and support. Initial response is prioritized by issue severity under the Service Level Agreement (SLA), which will be included with the LUCI Master Purchase and Services Agreement. Response targets are not guaranteed repair or restoration times. Remote support is included in the annual partnership; on-site service, where required, may be quoted separately unless expressly included. Manufacturer warranties and any designated LUCI CARE processing-equipment coverage apply as described in the final agreements.

DesignLED display warranty and support

LUCI and DesignLED want you to feel confident that your new LED displays are supported. The proposed LED system includes a two (2) year limited parts-only warranty covering LED tiles, receiving cards, power supplies, and frame systems. Coverage begins at product delivery, applies to the original purchaser only, and is not transferable. If a covered part has a defect in materials or workmanship, DesignLED will determine whether to repair or replace it; repaired or replacement parts remain covered for the balance of the original warranty period.

If an issue comes up, please contact LUCI through www.lucisystems.com/support or call 833-333-5868, option 1. Photos and a description of the issue are helpful. Defects must be reported in writing within 48 hours of discovery; if you call first to expedite support, please follow up in writing within four hours. LUCI will acknowledge LED parts-service requests within 24 hours during normal business hours (9:00 a.m.–5:00 p.m. Pacific, Monday–Friday, excluding national holidays) and coordinate the next steps with DesignLED.

The property will maintain the provided attic/safety stock so a replacement component can be used when needed. Defective components must be returned to DesignLED for evaluation and repair or replacement. The property pays outbound return shipping; DesignLED pays to send repaired or replacement components back. The warranty covers parts only, not on-site labor, incidental costs, or natural changes in brightness and color over time.

Coverage does not apply to damage from natural disasters, irregular power, physical impact, improper installation or operation, or conditions outside the specified operating range of -30°C to 50°C. Displays should never be cleaned with chemicals or liquid cleaners; please contact LUCI for recommended cleaning procedures. Display content creation, loading, and scheduling remain with the property, although LUCI will assist remotely in good faith when questions arise. Extended maintenance options may be available after the initial warranty term. The final LED warranty terms will govern the coverage and exclusions.

10 Inclusions

- The LUCI operating system annual partnership, consulting services, and subscription SLA.
- Endpoint licenses: 100 video, 40 audio, and 50 digital signage.
- LUCI scripting engine to communicate with 3rd party integrations such as gaming system for Jackpot and Promotional announcements.
- Two LUCI Core computers, installed at the head-end. LUCI Platform and LUCI support access.
- Ten control tablets with cases, PoE adaptors, and PoE injectors, installed by LUCI.
- Q-SYS Core redundant processors, Dante licenses, I/O, amplifiers, and adapters, installed and programmed by LUCI.
- Two hundred ceiling loudspeakers, furnished by LUCI.
- The Shure wireless system, antenna distribution, and wall-mount antennas listed in Section 8. LUCI installs the head-end wireless equipment and commissions the system.
- The DirecTV COM3000 head-end package, four LUCI encoders, and 100 LG set-top boxes. LUCI installs the head-end and the set-top boxes.
- Fifty TelemetryTV signage players, installed and configured by LUCI.
- The seven LED packages and nine Novastar processor sets in Section 8. LED pricing includes design, ocean freight, installation, programming, commissioning, testing, and workflow training.
- Mounting of wireless antennas and antenna cable.
- Design drawings, project management, remote and on-site coordination, procurement tracking the property can follow, video and audio programming, onboarding, and commissioning of the systems LUCI installs.
- Shipping of the furnished equipment to the property. Ocean freight for the LED displays is included in the LED pricing.
- Manufacturer warranties for the furnished products, and the LUCI subscription SLA.

11 Exclusions

- Installation of loudspeakers, including speaker cable and speaker backing.
- Furnish and installation of equipment racks. LUCI installs head-end equipment into racks set in place by others and provides the rack elevations.
- Furnish and installation of backing.
- Power, data, and speaker cabling and pathway, including conduit, backboxes, and cable to set-top boxes, signage players, tablets, antennas, and LED displays. PoE injectors for the ten tablets are included. Signal cable from each Novastar processor to its LED display is by others.
- Display panels, menu-board panels, and their mounts. Set-top boxes and signage players are included. The screens they attach to are not.
- Interactive wayfinding kiosks, directory content, and the point-of-interest database.
- Ambient-sense microphones.
- Lighting control licenses, fixtures, and architectural lighting.
- A house Ethernet upgrade, network switches, and the property LAN. This scope uses the network the property provides, including the connectivity needed for the on-premises LUCI servers, cloud-connected TelemetryTV players, and LUCI's secure remote-support VPN.
- The ongoing DirecTV programming subscription.
- Removal and disposal of existing loudspeakers, amplifiers, DSP, and related equipment.
- Structural engineering, permits, building modifications, rigging steel, and architectural enclosures.
- Content creation, menu artwork, promotional media, and translation.
- Changes inside Aristocrat Oasis or any other property gaming system. Coordination of an interface is part of onboarding.
- A multi-year on-site service agreement beyond commissioning, closeout, and the annual LUCI subscription. One can be added on request.

12 Assumptions

- Equipment is new and is supplied through the manufacturers and vendors on the line items.
- The property provides site access, a location for the head-end racks, and a location for the wireless charging stations.
- The property provides the network addresses, switch ports, cabling, internet connectivity for TelemetryTV, and a secure VPN tunnel for LUCI remote support, coordinated with property IT.
- Loudspeaker quantity, tablet locations, and final LED sizes are confirmed on the drawings and can change the related line items.
- The staggered pit pillar line is one wrap. The overhead directional line is one sign.
- Pillar wraps are four-sided until a field check says otherwise.
- Ceiling and soffit conditions accept the speaker layout and the ceiling-hung LED. Conditions that differ are a change.
- Commissioning of each LUCI-installed system begins when the related work by others is complete.
- The property provides staff for onboarding from Marketing, Information Technology, Facilities, Security, and A/V Operations.
- The property provides promotional content and menu information for the signage players.
- DirecTV service for the 138-channel head-end is the property's subscription.
- Sales tax is not included in this scope and will be confirmed for the tribal property.
- Work is coordinated with Information Technology, Facilities, Marketing, Security, and Gaming Operations, and follows applicable federal, state, local, and Tribal requirements.
- Shift timing for LUCI installation is agreed at kickoff. A different all-night requirement is identified before labor is treated as final.

End of RFP.



LUCI

BUILDING A STRONG A/V FOUNDATION WITH

YAAMAVA'

Since 2018, LUCI has partnered with San Manuel to modernize and orchestrate the multimedia systems powering its casino operations and guest experiences.

Yaamava' Resort & Casino Highland, California · San Manuel Band of Mission Indians

YAAMAVA' RESORT & CASINO AT SAN MANUEL	**8 years** **Of partnership** Since 2018	**17-story** **Hotel expansion** Supported by LUCI	**10+** **Venues & locations** Across the San Manuel enterprise

The partnership from start to today

As San Manuel's resorts has expanded, LUCI has reinforced the partnership by providing the engineering, design, implementation, and ongoing support each phase required.

2018
LUCI foundation installed
Network-based multimedia integration across the property's existing systems.

2020
Infrastructure overhaul
Casino-wide audio system replacement during the COVID closure window.

2021-22
Major resort expansion
Casino, hotel, spa, pool deck, dining, retail, and meeting spaces.

2022
The 909 sports bar
Large-scale LED and multimedia expansion for a world-class sports bar and food hall.


2023-TODAY
Enterprise-wide support
Yaamava', Palms, corporate offices, and other facilities across the San Manuel enterprise.

A new foundation for a growing property

When LUCI partnered with San Manuel Casino in 2018, the property operated six separate audio systems and four video systems, each managed independently. This patchwork of equipment and controls made even routine operations unnecessarily complex, with no single way to manage the property as a whole.

LUCI's platform integrated the property's existing endpoints and systems, unifying them over the property's network under one control interface. Suddenly, what had been a collection of disconnected systems became a coordinated environment that was easier to manage and ready to grow. The project also helped drive LUCI's move away from restrictive proprietary control systems toward the open, software-based orchestration approach it uses today.

When COVID temporarily closed the casino in 2020, San Manuel and LUCI used the opportunity to overhaul its audio infrastructure. LUCI designed the new system, procured equipment, and coordinated installation partners—expanding its role in engineering and project management ahead of the property's major resort expansion.

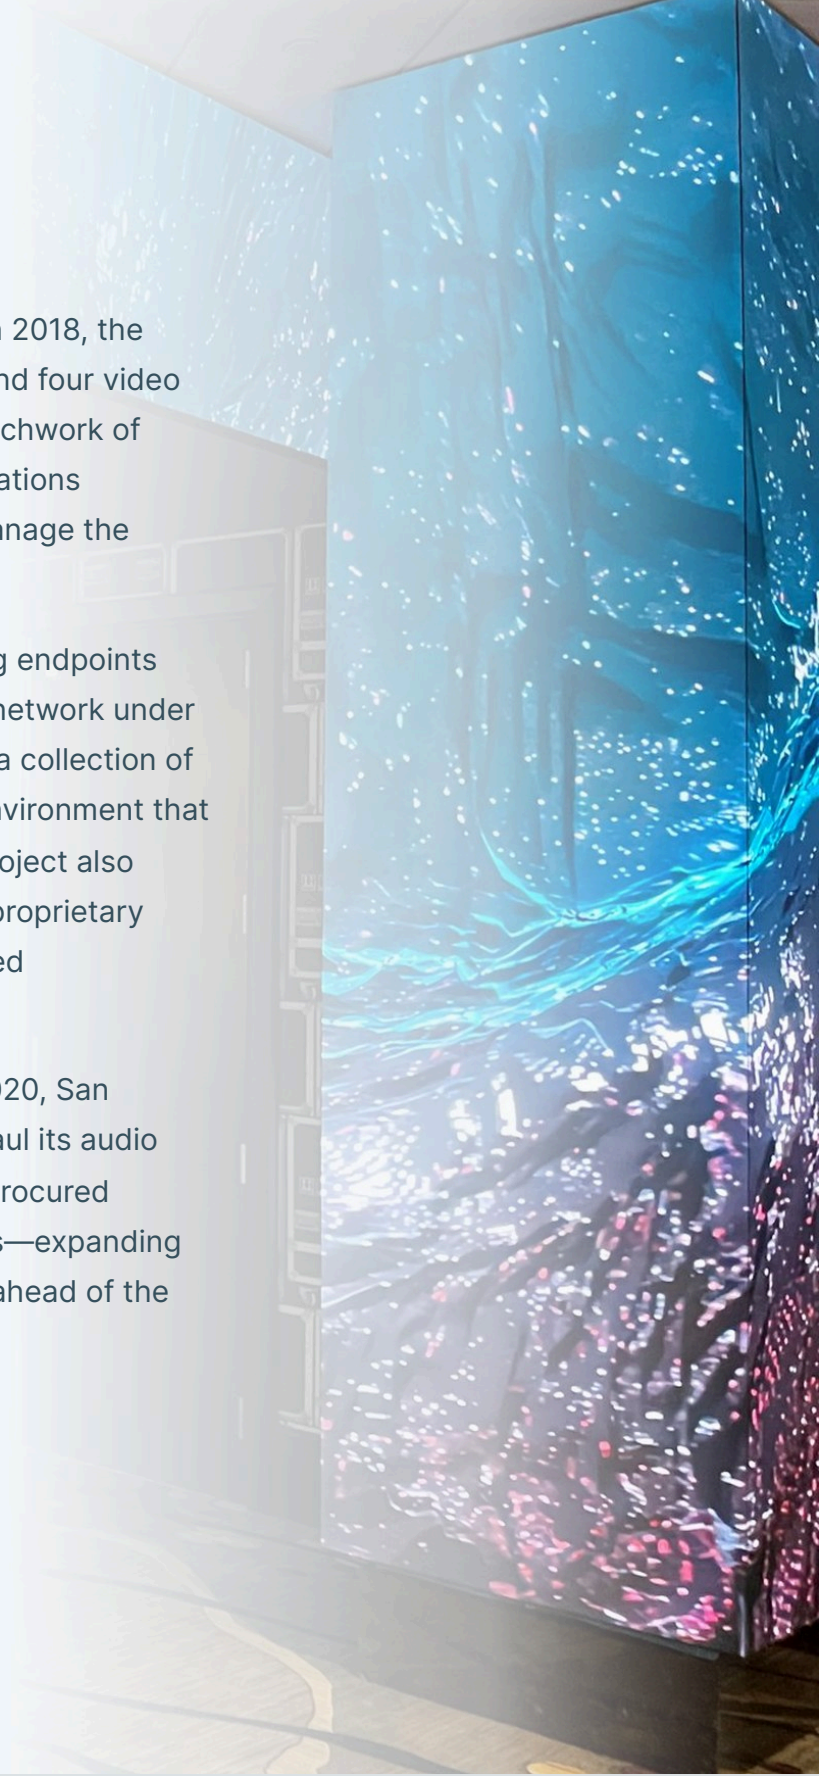

1,000+


speakers replaced in eight months

New cabling, redesigned audio zones, and improved sound tuning and volume control throughout the casino.

Engineering alongside Yaamava's expansion



STRUCTURE

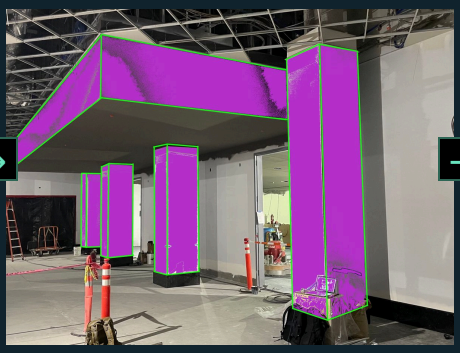

DESIGN



INSTALLED

As San Manuel advanced its major resort expansion, LUCI worked alongside the property's design and construction teams, architects, and other technical disciplines to ensure its A/V systems were engineered to work seamlessly from the start. The multi-year development added expanded gaming space, a 17-story hotel tower, spa, pool deck, restaurants, bars, retail, and meeting spaces, transforming San Manuel Casino into Yaamava' Resort & Casino.

LUCI contributed design, technical planning, construction coordination, and implementation throughout the project. The existing LUCI architecture scaled to accommodate new amplifiers, televisions, and control points without requiring separate audio, video, or control systems for each new space. The property continued to grow while maintaining a coordinated multimedia environment across the resort.

WHAT THE EXPANSION ADDED

- Expanded gaming space
- 17-story hotel tower
- Spa
- Pool deck
- Restaurants & bars
- Retail
- Meeting spaces

> **LUCI is the A/V backbone of the expanded resort.**



The 909 — every screen in the room on the same platform.

New venues. The same foundation.


50′ × 12′
Game Day display

150+
Screens throughout the venue


LED archway

The next major development brought LUCI's expertise to The 909, a world-class sports bar and food hall. Working with the architect of record and project teams, LUCI helped create an extensive LED environment featuring a 50-foot-wide Game Day display, an LED archway, and more than 150 screens throughout the venue.

Rather than introduce another standalone A/V system, LUCI expanded the backbone already in place at Yaamava'. The 909 joined the same multimedia management environment serving the rest of the property, extending centralized control to an entirely new guest experience.

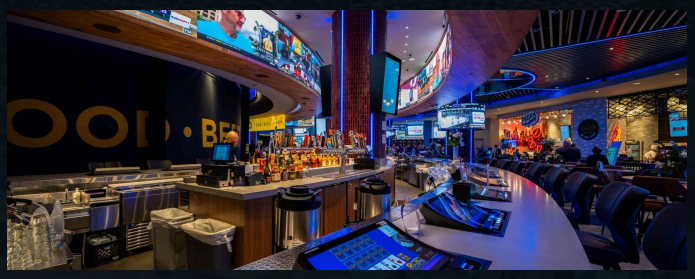

The 909 bar and video ribbon

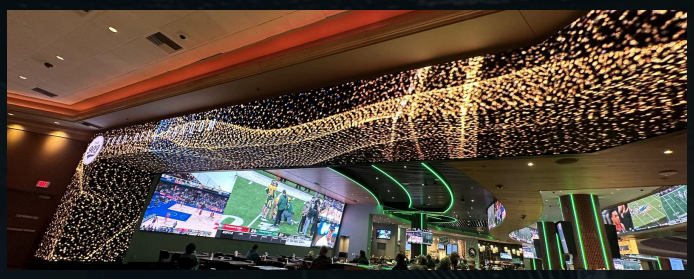

Ceiling LED over the sportsbook floor

34

LED walls across seven venues

Over the course of the partnership, LUCI designed and installed LED walls throughout the property, integrating each addition into the existing LUCI environment.

What eight years of partnership has built

Across these projects, LUCI worked as part of Yaamava's extended technology organization.

That continuity matters. The LUCI engineers supporting the next project already understand the systems in place, the decisions behind them, and the property's broader operational goals. They can move directly into each new phase of development, solve new technical challenges, and maintain the infrastructure already supporting its guests.

> *"What I love about LUCI's approach is that they really focus on how to make the operations easier for the business, and they do it in a really cost-effective manner. They look for ways to implement solutions that are easy to administer, have a reasonable cost point, and are easy to use."*
>
> **TONI PEPPER**
> CITO, SAN MANUEL BAND OF MISSION INDIANS

Yaamava' on LUCI to date

1,000+	34	284	220	14
Property endpoints	LED walls	Audio zones	Digital signage endpoints	Technologies orchestrated



One LUCI platform

Every endpoint, every zone, every wall, every channel — one interface.

A foundation for the future

The relationship that began at San Manuel Casino now extends throughout the broader San Manuel enterprise. Each environment brings its own requirements, but LUCI applies the same approach everywhere: understand the operation, develop the right solution, coordinate the work, and remain accountable for the technology long after installation.

Through ongoing maintenance, system improvements, and planning for future projects, LUCI continues supporting the enterprise as its needs evolve.

WHERE LUCI SUPPORTS SAN MANUEL TODAY

- Yaamava' Resort & Casino
- Palms Casino Resort
- Corporate offices
- Conference rooms
- Firehouses
- Schools
- Banquet spaces

Your property's technology needs will change. Your technology partner should be prepared to meet them.

Talk to LUCI →

ABOUT LUCI

LUCI Systems is the orchestration engine for enterprise multimedia — A/V, signage, building, and operational infrastructure — from a single interface your team controls from anywhere. LUCI reduces the variables, hardware, and interfaces your team has to manage. When onsite experience and operational continuity are non-negotiable, LUCI delivers coordinated, real-time execution, end to end.

LUCI

NEXT STEP

A PROPERTY THAT GETS SIMPLER AS IT GROWS.

Take your time reviewing this RFP, and reach out when you're ready to walk the property together.

YOUR CONTACT

Michael Epstein

mepstein@lucisystems.com

LUCI Systems, LLC

6280 S. Valley View Blvd., Bldg. B / Ste. 208
Las Vegas, NV 89118
(833) 333-5868
LUCIsystems.com